

Relativistic Dynamics and Electrodynamics in Uniformly Accelerated and in Uniformly Rotating Frames-The General Expressions for the Electromagnetic 4-Vector Potential

Adrian Sfarti

University of California, 387 Soda Hall, UC Berkeley, California, USA
 egas@pacbell.net

(Received 25th May, 2017; Revised 14th June 2017; Accepted 26th June, 2017; Published: 30th June, 2017)

Abstract- In the current paper we present a generalization of the transforms from the frame co-moving with an accelerated particle, for either rectilinear or circular motion, into an inertial frame of reference. The solution is of great interest for real time applications, because earth-bound laboratories are inertial only in approximation, The motivation is that the real life applications include accelerating and rotating frames with arbitrary orientation more often than the idealized case of inertial frames; our daily experiments happen in the laboratories attached to the rotating Earth. Our paper is divided into two main sections, the first section deals with dynamics, i.e. forces, the second section deals with electromagnetism, i.e. electromagnetic potentials.

Key Words: Accelerated motion, General coordinate transformations, Accelerated particles, Uniform rotation, Four-force vector, Four-electromagnetic vector.

1. INTRODUCTION

Real life applications include accelerating and rotating frames more often than the idealized case of inertial frames. Our daily experiments happen in the laboratories attached to the rotating Earth. Many books and papers have been dedicated to transformations between particular cases of rectilinear acceleration and/or rotation [1] and to the applications of such formulas [2-13, 15]. There is great interest in producing a general solution that deals with arbitrary orientation of acceleration in the case of rectilinear motion and for arbitrary direction of uniform angular velocity.

The main idea of this paper is to generate a standard blueprint for a general solution. The blueprint relies on transforming the problem geometrically in the “canonical reference frame” of [1], followed by the application of the physical transforms derived for such “canonical” orientations [1-7] and ending with the application of the inverse geometrical transformation:

$$\text{Geometry_Transform} \quad - \quad > \quad \text{Physics_Transform} \quad - \\ > \text{Inverse_Geometry_Transform} \quad (1)$$

We conclude our paper with a practical application of deriving the formula of the Lorentz force in a uniformly rotating frame.

2. DYNAMICS IN ACCELERATED RECTILINEAR MOTION

Let S represent an inertial system of coordinates and $S'(\tau)$ an accelerated one. Moller [1] considers a particular case where a particle moves with acceleration $g=(g,0,0)$ aligned with the x-axis. According to reference [1] the transformation for the particular case from $S'(\tau)$ into S is:

$$\begin{pmatrix} x \\ y \\ z \\ ct \end{pmatrix} = \text{Phy_rectilinear} \begin{pmatrix} x' \\ y' \\ z' \\ ct' \end{pmatrix} \quad (2)$$

where

$$\text{Phy_rectilinear} = \begin{bmatrix} \cosh \frac{g\tau}{c} & 0 & 0 & \sinh \frac{g\tau}{c} \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ \sinh \frac{g\tau}{c} & 0 & 0 & \cosh \frac{g\tau}{c} \end{bmatrix} \quad (3)$$

$$\frac{d}{dt} \begin{pmatrix} x \\ y \\ z \\ ct \end{pmatrix} = \frac{\text{Phy_rectilinear} \frac{d}{dt'} \begin{pmatrix} x' \\ y' \\ z' \\ ct' \end{pmatrix} + \frac{d\text{Phy_rectilinear}}{dt'} \begin{pmatrix} x' \\ y' \\ z' \\ ct' \end{pmatrix}}{\frac{dt}{dt'}} \\ = \frac{\text{Phy_rectilinear} \frac{d}{dt'} \begin{pmatrix} x' \\ y' \\ z' \\ ct' \end{pmatrix} + \frac{d\text{Phy_rectilinear}}{d\tau} \frac{d\tau}{dt'} \begin{pmatrix} x' \\ y' \\ z' \\ ct' \end{pmatrix}}{\frac{dt}{dt'}} \quad (4)$$

Therefore

$$\begin{aligned} & \text{Phy_rectilinear} \begin{pmatrix} v_x' \\ v_y' \\ v_z' \\ c \end{pmatrix} \\ & + \frac{d\text{Phy_rectilinear}}{d\tau} \frac{1}{\sqrt{1 + \left(\frac{gt'}{c}\right)^2}} \begin{pmatrix} x' \\ y' \\ z' \\ ct' \end{pmatrix} \\ \begin{pmatrix} v_x \\ v_y \\ v_z \\ c \end{pmatrix} &= \frac{\frac{v_x'}{c} \sinh \frac{g\tau}{c} + \cosh \frac{g\tau}{c}}{\sqrt{1 + \left(\frac{gt'}{c}\right)^2}} \begin{pmatrix} x' \\ y' \\ z' \\ ct' \end{pmatrix} \\ & + \frac{\frac{g}{c}}{\sqrt{1 + \left(\frac{gt'}{c}\right)^2}} \left(\frac{x'}{c} \cosh \frac{g\tau}{c} + t' \sinh \frac{g\tau}{c} \right) \end{aligned} \quad (5)$$

where

$$\frac{d\text{Phy_rectilinear}}{d\tau} = \frac{g}{c} \begin{bmatrix} \sin \frac{g\tau}{c} & 0 & 0 & \cos \frac{g\tau}{c} \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ \cos \frac{g\tau}{c} & 0 & 0 & \sin \frac{g\tau}{c} \end{bmatrix} \quad (6)$$

The speed measured in the inertial frame depends both on the speed and the position measured in the accelerated frame. If we consider the case of the accelerated frame commoving with the object (particle) under study, then:

$$\begin{pmatrix} x' \\ y' \\ z' \\ ct' \end{pmatrix} = \begin{pmatrix} 0 \\ 0 \\ 0 \\ ct' \end{pmatrix} \quad (7)$$

and

$$\begin{aligned} & \text{Phy_rectilinear} \begin{pmatrix} v_x' \\ v_y' \\ v_z' \\ c \end{pmatrix} \\ & + \frac{d\text{Phy_rectilinear}}{d\tau} \frac{1}{\sqrt{1 + \left(\frac{gt'}{c}\right)^2}} \begin{pmatrix} x' \\ y' \\ z' \\ ct' \end{pmatrix} \\ \begin{pmatrix} v_x \\ v_y \\ v_z \\ c \end{pmatrix} &= \frac{\frac{v_x'}{c} \sinh \frac{g\tau}{c} + \cosh \frac{g\tau}{c}}{\sqrt{1 + \left(\frac{gt'}{c}\right)^2}} \begin{pmatrix} x' \\ y' \\ z' \\ ct' \end{pmatrix} \\ & + \frac{\frac{g}{c}}{\sqrt{1 + \left(\frac{gt'}{c}\right)^2}} \left(\frac{x'}{c} \cosh \frac{g\tau}{c} + t' \sinh \frac{g\tau}{c} \right) \end{aligned} \quad (8)$$

In the following section we generalize his derivation for the arbitrary case $g = (g_x, g_y, g_z)$ for obtaining the general four-space coordinate transformations that take us from $S'(\tau)$ into S . Expressed in polar coordinates, the acceleration has the form:

$$\begin{aligned} g_x &= g \cos \theta \cos \phi \\ g_z &= g \sin \theta \cos \phi \\ g_y &= g \sin \phi \end{aligned} \quad (9)$$

$$\begin{aligned} \phi &= \arcsin \frac{g_y}{g} \\ \theta &= \arctan \frac{g_z}{g_x} \end{aligned}$$

The first step rotates the unit vector of acceleration g by $90^\circ - \phi$ around the axis the vector cross-product $g \times e_y = -\frac{g_z}{g} e_x + \frac{g_x}{g} e_z$ such g gets aligned with the y -axis,

Fig. 1. For this purpose, we will introduce the triplet $(a, b, c) = \left(-\frac{g_z}{g}, 0, \frac{g_x}{g}\right)$. The following expressions

hold [14]:

$$\text{Rot}_y = \begin{bmatrix} c & 0 & -a & 0 \\ 0 & 1 & 0 & 0 \\ a & 0 & c & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \quad (10)$$

$$\text{Rot}(e_y)_{90^\circ - \phi} = \begin{bmatrix} \cos(90^\circ - \phi) & 0 & -\sin(90^\circ - \phi) & 0 \\ 0 & 1 & 0 & 0 \\ \sin(90^\circ - \phi) & 0 & \cos(90^\circ - \phi) & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \quad (11)$$

$$= \begin{bmatrix} \sin \phi & 0 & -\cos \phi & 0 \\ 0 & 1 & 0 & 0 \\ \cos \phi & 0 & \sin \phi & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

$\text{Rot}(e_y)_{90^\circ - \phi} * \text{Rot}_y$ aligns g with e_y . The second step is comprised by another rotation around the z -axis by -90° that aligns g with e_x :

$$\text{Rot}(e_y)_{-90^\circ} = \begin{bmatrix} 0 & 1 & 0 & 0 \\ -1 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \quad (12)$$

Putting it all together:

$$\text{Rr} = \text{Rot}(e_x)_{90^\circ} * \text{Rot}(e_y)_{90^\circ - \phi} * \text{Rot}_y \quad (13)$$

The general coordinate transformation between S and $S(\tau)$ is:

$$\begin{pmatrix} x \\ y \\ z \\ ct \end{pmatrix} = A \begin{pmatrix} x' \\ y' \\ z' \\ ct' \end{pmatrix} \quad (14)$$

where

$$Rr^{-1} * Phy_rectilinear * Rr = \begin{bmatrix} a_{11} & a_{12} & a_{13} & a_{14} \\ a_{21} & a_{22} & a_{23} & a_{24} \\ a_{31} & a_{32} & a_{33} & a_{34} \\ a_{41} & a_{42} & a_{43} & a_{44} \end{bmatrix} \quad (15)$$

The general velocity transformation is therefore:

$$\begin{pmatrix} v_x \\ v_y \\ v_z \\ c \end{pmatrix} = \frac{A \begin{pmatrix} v_x' \\ v_y' \\ v_z' \\ c \end{pmatrix} + \frac{1}{\sqrt{1 + \left(\frac{gt'}{c}\right)^2}} \frac{dA}{d\tau} \begin{pmatrix} x' \\ y' \\ z' \\ ct' \end{pmatrix}}{\frac{v_x'}{c} a_{41} + \frac{v_y'}{c} a_{42} + \frac{v_z'}{c} a_{43} + a_{44}} + \frac{1}{\sqrt{1 + \left(\frac{gt'}{c}\right)^2}} \left(x' \frac{da_{41}}{cd\tau} + y' \frac{da_{42}}{cd\tau} + z' \frac{da_{43}}{cd\tau} + t' \frac{da_{44}}{cd\tau} \right) \quad (16)$$

where

$$\frac{dA}{d\tau} = Rr^{-1} * \frac{dPhy_rectilinear}{d\tau} * Rr \quad (17)$$

The inverse transform is:

$$\begin{pmatrix} v_x' \\ v_y' \\ v_z' \\ c \end{pmatrix} = \frac{A^{-1} \begin{pmatrix} v_x \\ v_y \\ v_z \\ c \end{pmatrix} + \frac{1}{\sqrt{1 + \left(\frac{gt}{c}\right)^2}} \frac{dA^{-1}}{d\tau} \begin{pmatrix} v_x \\ v_y \\ v_z \\ ct \end{pmatrix}}{\frac{v_x}{c} b_{41} + \frac{v_y}{c} b_{42} + \frac{v_z}{c} b_{43} + b_{44}} + \frac{1}{\sqrt{1 + \left(\frac{gt}{c}\right)^2}} \left(x \frac{db_{41}}{cd\tau} + y \frac{db_{42}}{cd\tau} + z \frac{db_{43}}{cd\tau} + t \frac{db_{44}}{cd\tau} \right) \quad (18)$$

where

$$\begin{bmatrix} b_{11} & b_{12} & b_{13} & b_{14} \\ b_{21} & b_{22} & b_{23} & b_{24} \\ b_{31} & b_{32} & b_{33} & b_{34} \\ b_{41} & b_{42} & b_{43} & b_{44} \end{bmatrix} = A^{-1} = Rr^{-1} * Phy_rectilinear * Rr \quad (19)$$

If we consider the case of the accelerated frame commoving with the object (particle) under study, then:

$$\begin{pmatrix} x' \\ y' \\ z' \\ ct' \end{pmatrix} = \begin{pmatrix} 0 \\ 0 \\ 0 \\ ct' \end{pmatrix} \quad (20)$$

and (18) simplifies to:

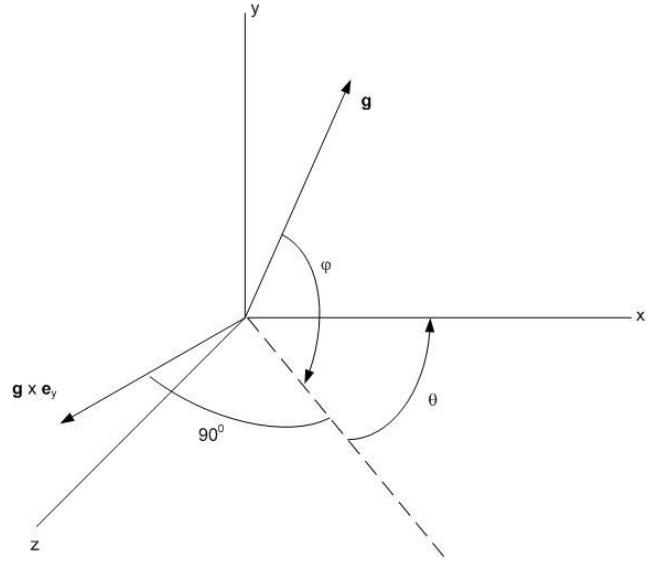


Fig. 1: Arbitrary direction rectilinear accelerated motion

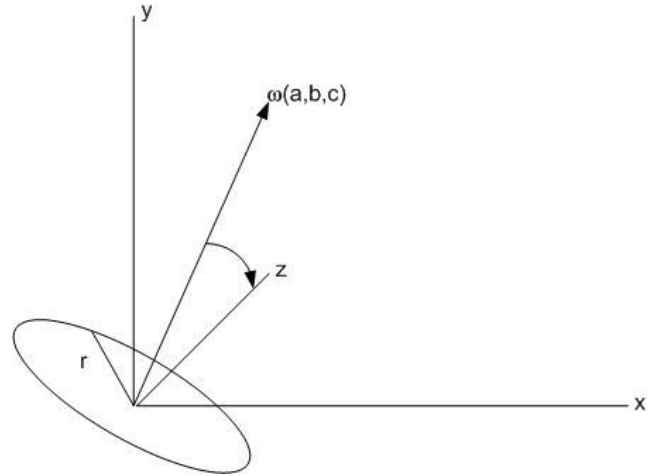


Fig. 2: Uniform rotation with arbitrary direction of angular velocity

$$\begin{pmatrix} v_x \\ v_y \\ v_z \\ c \end{pmatrix} = \frac{A \begin{pmatrix} v_x' \\ v_y' \\ v_z' \\ c \end{pmatrix} + \frac{dA}{d\tau} \begin{pmatrix} 0 \\ 0 \\ 0 \\ ct' \end{pmatrix}}{\frac{v_x'}{c} a_{41} + \frac{v_y'}{c} a_{42} + \frac{v_z'}{c} a_{43} + a_{44} + \frac{t' \frac{da_{44}}{d\tau}}{\sqrt{1 + \left(\frac{gt'}{c}\right)^2}}} \quad (21)$$

The coordinate acceleration can be derived immediately as:

$$\begin{pmatrix} a_x \\ a_y \\ a_z \\ 0 \end{pmatrix} = \frac{d}{dt} \begin{pmatrix} v_x \\ v_y \\ v_z \\ c \end{pmatrix} = \frac{d}{dt'} \begin{pmatrix} v_x \\ v_y \\ v_z \\ c \end{pmatrix} \quad (22)$$

The energy-momentum transforms the same way as the 4-coordinates (14) by virtue of being a 4-vector:

$$\begin{pmatrix} p_x \\ p_y \\ p_z \\ E/c \end{pmatrix} = A \begin{pmatrix} p_x' \\ p_y' \\ p_z' \\ E'/c \end{pmatrix} \quad (23)$$

Therefore:

$$\begin{pmatrix} F_x \\ F_y \\ F_z \\ \frac{1}{c} \frac{dE}{dt} \end{pmatrix} = \frac{A \begin{pmatrix} F_x' \\ F_y' \\ F_z' \\ \frac{1}{c} \frac{dE'}{dt'} \end{pmatrix} + \frac{1}{\sqrt{1 + \left(\frac{gt'}{c}\right)^2}} \frac{dA}{d\tau} \begin{pmatrix} p_x' \\ p_y' \\ p_z' \\ E'/c \end{pmatrix}}{\frac{v_x'}{c} a_{41} + \frac{v_y'}{c} a_{42} + \frac{v_z'}{c} a_{43} + a_{44}} + \frac{1}{\sqrt{1 + \left(\frac{gt'}{c}\right)^2}} \left(x' \frac{da_{41}}{cd\tau} + y' \frac{da_{42}}{cd\tau} + z' \frac{da_{43}}{cd\tau} + t' \frac{da_{44}}{cd\tau} \right) \quad (24)$$

The inverse transform, from the inertial frame S into the accelerated frame S', is:

$$\begin{pmatrix} F_x' \\ F_y' \\ F_z' \\ \frac{1}{c} \frac{dE'}{dt'} \end{pmatrix} = \frac{A^{-1} \begin{pmatrix} F_x \\ F_y \\ F_z \\ \frac{1}{c} \frac{dE}{dt} \end{pmatrix} + \frac{1}{\sqrt{1 + \left(\frac{gt}{c}\right)^2}} \frac{dA^{-1}}{d\tau} \begin{pmatrix} p_x \\ p_y \\ p_z \\ E/c \end{pmatrix}}{\frac{v_x}{c} b_{41} + \frac{v_y}{c} b_{42} + \frac{v_z}{c} b_{43} + b_{44}} + \frac{1}{\sqrt{1 + \left(\frac{gt}{c}\right)^2}} \left(x \frac{db_{41}}{cd\tau} + y \frac{db_{42}}{cd\tau} + z \frac{db_{43}}{cd\tau} + t \frac{db_{44}}{cd\tau} \right) \quad (25)$$

If we consider the case of the accelerated frame commoving with the object (particle) under study, then:

$$\begin{pmatrix} x' \\ y' \\ z' \\ ct' \end{pmatrix} = \begin{pmatrix} 0 \\ 0 \\ 0 \\ ct' \end{pmatrix} \quad (26)$$

and

$$\begin{pmatrix} p_x' \\ p_y' \\ p_z' \\ E'/c \end{pmatrix} = \begin{pmatrix} 0 \\ 0 \\ 0 \\ m_0 c^2 / c \end{pmatrix} \quad (27)$$

In this case:

$$\begin{pmatrix} F_x \\ F_y \\ F_z \\ \frac{1}{c} \frac{dE}{dt} \end{pmatrix} = \frac{A \begin{pmatrix} F_x' \\ F_y' \\ F_z' \\ 0 \end{pmatrix} + \frac{1}{\sqrt{1 + \left(\frac{gt'}{c}\right)^2}} \frac{dA}{d\tau} \begin{pmatrix} 0 \\ 0 \\ 0 \\ m_0 c \end{pmatrix}}{a_{44} + \frac{t' \frac{da_{44}}{d\tau}}{\sqrt{1 + \left(\frac{gt'}{c}\right)^2}}} \quad (28)$$

3. DYNAMICS IN UNIFORM ANGULAR VELOCITY ROTATION

In this section we discuss the case of the particle moving in an arbitrary plane, with the normal given by the constant angular velocity $\omega(a, b, c)$, Fig. 2. According to Moller [1], the simpler case when ω is aligned with the z-axis produces the transformation between the rotating frame $S'(\tau)$ attached to the particle and an inertial, non-rotating frame S attached to the center of rotation:

$$\begin{pmatrix} x \\ y \\ z \\ ct \end{pmatrix} = Phy_rotation \begin{pmatrix} x' \\ y' \\ z' \\ t' \end{pmatrix} \quad (29)$$

where

$$Phy_rotation = \begin{bmatrix} \cos \alpha \cos \beta + \gamma \sin \alpha \sin \beta & & & \\ \cos \alpha \sin \beta - \gamma \sin \alpha \cos \beta & & & \\ 0 & & & \\ \frac{u\gamma}{c} \sin \alpha & & & \\ \sin \alpha \cos \beta - \gamma \cos \alpha \sin \beta & 0 & -\frac{u\gamma}{c} \sin \beta & \\ \sin \alpha \sin \beta + \gamma \cos \alpha \cos \beta & 0 & -\frac{u\gamma}{c} \cos \beta & \\ 0 & 1 & 0 & \\ -\frac{u\gamma}{c} \cos \alpha & 0 & \gamma & \end{bmatrix} \quad (30)$$

$$\gamma = \frac{1}{\sqrt{1 - \frac{u^2}{c^2}}} \quad (31)$$

$$u = r\omega$$

$$\alpha = \omega\gamma\tau$$

$$\beta = \omega\gamma^2\tau$$

The general case is treated by transforming the problem into the particular case treated in [1] through a transformation into the "canonical case", followed by an application of the transformation from the accelerated frame into the inertial frame, ending with the inverse of the first transformation, as shown below

$$\begin{pmatrix} x \\ y \\ z \\ t \end{pmatrix} = (Rr^{-1} * rotation * Rr) \begin{pmatrix} x' \\ y' \\ z' \\ t' \end{pmatrix} = A \begin{pmatrix} x' \\ y' \\ z' \\ t' \end{pmatrix} \quad (32)$$

$$Rr = Rot(e_x)_{90^0} * Rot(e_y)_{90^0-\phi} * Rot_y \quad (33)$$

$Rot(e_y)_{90^0-\phi} * Rot_y$ aligns g with e_y . The second step is comprised by another rotation around the x-axis by 90^0 that aligns ω with e_z :

$$Rot(e_x)_{90^0} = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & 0 & -1 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix} \quad (34)$$

Expression (32) gives the solution for the general case, of arbitrary angular velocity direction.

The general velocity transformation is:

$$\begin{pmatrix} v_x \\ v_y \\ v_z \\ ct \end{pmatrix} = \frac{A \begin{pmatrix} v_x' \\ v_y' \\ v_z' \\ ct' \end{pmatrix} + \sqrt{1 - \left(\frac{r\omega}{c}\right)^2} \frac{dA}{d\tau} \begin{pmatrix} x' \\ y' \\ z' \\ ct' \end{pmatrix}}{\frac{v_x'}{c} a_{41} + \frac{v_y'}{c} a_{42} + \frac{v_z'}{c} a_{43} + a_{44}} + \sqrt{1 - \left(\frac{r\omega}{c}\right)^2} \left(x' \frac{da_{41}}{cd\tau} + y' \frac{da_{42}}{cd\tau} + z' \frac{da_{43}}{cd\tau} + t' \frac{da_{44}}{cd\tau} \right) \quad (35)$$

The general force transformation is:

$$\begin{pmatrix} F_x \\ F_y \\ F_z \\ \frac{1}{c} \frac{dE}{dt} \end{pmatrix} = \frac{A \begin{pmatrix} F_x' \\ F_y' \\ F_z' \\ \frac{1}{c} \frac{dE'}{dt'} \end{pmatrix} + \sqrt{1 - \left(\frac{r\omega}{c}\right)^2} \frac{dA}{d\tau} \begin{pmatrix} p_x' \\ p_y' \\ p_z' \\ E'/c \end{pmatrix}}{\frac{v_x'}{c} a_{41} + \frac{v_y'}{c} a_{42} + \frac{v_z'}{c} a_{43} + a_{44}} + \sqrt{1 - \left(\frac{r\omega}{c}\right)^2} \left(x' \frac{da_{41}}{cd\tau} + y' \frac{da_{42}}{cd\tau} + z' \frac{da_{43}}{cd\tau} + t' \frac{da_{44}}{cd\tau} \right) \quad (36)$$

where:

$$A = Rr^{-1} * Phy_rotation * Rr \quad (37)$$

The reverse transformation is:

$$\begin{pmatrix} F_x' \\ F_y' \\ F_z' \\ \frac{1}{c} \frac{dE'}{dt'} \end{pmatrix} = \frac{A^{-1} \begin{pmatrix} F_x \\ F_y \\ F_z \\ \frac{1}{c} \frac{dE}{dt} \end{pmatrix} + \sqrt{1 - \left(\frac{r\omega}{c}\right)^2} \frac{dA^{-1}}{d\tau} \begin{pmatrix} p_x \\ p_y \\ p_z \\ E/c \end{pmatrix}}{\frac{v_x}{c} b_{41} + \frac{v_y}{c} b_{42} + \frac{v_z}{c} b_{43} + b_{44}} + \sqrt{1 - \left(\frac{r\omega}{c}\right)^2} \left(x \frac{db_{41}}{cd\tau} + y \frac{db_{42}}{cd\tau} + z \frac{db_{43}}{cd\tau} + t \frac{db_{44}}{cd\tau} \right) \quad (38)$$

where:

$$\begin{bmatrix} b_{11} & b_{12} & b_{13} & b_{14} \\ b_{21} & b_{22} & b_{23} & b_{24} \\ b_{31} & b_{32} & b_{33} & b_{34} \\ b_{41} & b_{42} & b_{43} & b_{44} \end{bmatrix} = A^{-1} = Rr^{-1} * Phy_rotation * Rr \quad (39)$$

We will use (38) in the next section, an application that determines the expression of the Lorentz force in a rotating frame.

4. APPLICATION-THE EXPRESSION OF THE LORENTZ FORCE IN A UNIFORMLY ROTATING FRAME

Assume that we have a particle of charge q and mass m moving in the x-y plane under the influence of a magnetic field B aligned with the z axis. We know that in the frame of the lab, the expression of the Lorentz force acting on the particle is

$$F = qv \times B = q \begin{bmatrix} i & j & k \\ r\omega \cos(\omega t) & r\omega \sin(\omega t) & 0 \\ 0 & 0 & B \end{bmatrix} \quad (40)$$

We would like to find out the expression of the force in the frame co-rotating with the charged particle. For this purpose we will resort to (38)

$$\begin{pmatrix} F_x' \\ F_y' \\ F_z' \\ \frac{1}{c} \frac{dE'}{dt'} \end{pmatrix} = \frac{A^{-1} \begin{pmatrix} F_x \\ F_y \\ F_z \\ \frac{1}{c} \frac{dE}{dt} \end{pmatrix} + \sqrt{1 - \left(\frac{r\omega}{c}\right)^2} \frac{dA^{-1}}{d\tau} \begin{pmatrix} p_x \\ p_y \\ p_z \\ E/c \end{pmatrix}}{\frac{v_x}{c} b_{41} + \frac{v_y}{c} b_{42} + \frac{v_z}{c} b_{43} + b_{44}} + \sqrt{1 - \left(\frac{r\omega}{c}\right)^2} \left(x \frac{db_{41}}{cd\tau} + y \frac{db_{42}}{cd\tau} + z \frac{db_{43}}{cd\tau} + t \frac{db_{44}}{cd\tau} \right) \quad (41)$$

We know that [15,16]:

$$\begin{pmatrix} x \\ y \\ z \\ t \end{pmatrix} = \begin{pmatrix} r \cos(\omega t) \\ r \sin(\omega t) \\ 0 \\ t \end{pmatrix} \quad (42)$$

$$\begin{aligned} v_x &= -r\omega \sin(\omega t) \\ v_y &= r\omega \cos(\omega t) \end{aligned} \quad (43)$$

$$\begin{aligned} v_z &= 0 \\ p_x &= \frac{mr\omega \sin(\omega t)}{\sqrt{1 - \left(\frac{r\omega}{c}\right)^2}} \\ p_y &= \frac{mr\omega \cos(\omega t)}{\sqrt{1 - \left(\frac{r\omega}{c}\right)^2}} \end{aligned} \quad (44)$$

$$\begin{aligned} p_z &= 0 \\ E &= \frac{mc^2}{\sqrt{1 - \left(\frac{r\omega}{c}\right)^2}} \\ F_x &= qBr\omega \sin(\omega t) \\ F_y &= -gBr\omega \cos(\omega t) \\ F_z &= 0 \end{aligned} \quad (45)$$

Substituting (42-45) into (41) we obtain:

$$\begin{aligned} &A^{-1} \begin{pmatrix} qBr\omega \sin(\omega t) \\ -gBr\omega \cos(\omega t) \\ 0 \\ 0 \end{pmatrix} \\ &+ \sqrt{1 - \left(\frac{r\omega}{c}\right)^2} \frac{dA^{-1}}{d\tau} \begin{pmatrix} -\frac{mr\omega \sin(\omega t)}{\sqrt{1 - \left(\frac{r\omega}{c}\right)^2}} \\ \frac{mr\omega \cos(\omega t)}{\sqrt{1 - \left(\frac{r\omega}{c}\right)^2}} \\ 0 \\ \frac{mc^2}{\sqrt{1 - \left(\frac{r\omega}{c}\right)^2}} \end{pmatrix} \\ \left(\begin{array}{l} F_x' \\ F_y' \\ F_z' \\ \frac{1}{c} \frac{dE'}{dt'} \end{array} \right) &= \frac{\begin{pmatrix} -r\omega \sin(\omega t) \\ r\omega \cos(\omega t) \\ 0 \\ \frac{mc^2}{\sqrt{1 - \left(\frac{r\omega}{c}\right)^2}} \end{pmatrix}}{\frac{-r\omega \sin(\omega t)}{c} b_{41} + \frac{r\omega \cos(\omega t)}{c} b_{42} + b_{44} + \sqrt{1 - \left(\frac{r\omega}{c}\right)^2}} \\ &\left(r \cos(\omega t) \frac{db_{41}}{cd\tau} + r \sin(\omega t) \frac{db_{42}}{cd\tau} + t \frac{db_{44}}{cd\tau} \right) \end{aligned} \quad (46)$$

To the above, we need to add [16] the fact that:

$$\begin{aligned} \omega &= \frac{qB}{\gamma(v_0)m} \\ r &= \frac{\gamma(v_0)mv_0}{qB} \end{aligned} \quad (47)$$

In (47) v_0 is the initial speed of the particle at $t = 0$. Armed with that (46) gets the simpler form:

$$\begin{aligned} &A^{-1} \begin{pmatrix} qBv_0 \sin\left(\frac{qBt}{\gamma(v_0)m}\right) \\ -qBv_0 \cos\left(\frac{qBt}{\gamma(v_0)m}\right) \\ 0 \\ 0 \end{pmatrix} \\ &+ \frac{dA^{-1}}{d\tau} \begin{pmatrix} -mv_0 \sin\left(\frac{qBt}{\gamma(v_0)m}\right) \\ mv_0 \cos\left(\frac{qBt}{\gamma(v_0)m}\right) \\ 0 \\ mc \end{pmatrix} \\ \left(\begin{array}{l} F_x' \\ F_y' \\ F_z' \\ \frac{1}{c} \frac{dE'}{dt'} \end{array} \right) &= \frac{\begin{pmatrix} v_0 b_{42} \cos\left(\frac{qBt}{\gamma(v_0)m}\right) \\ v_0 b_{41} \sin\left(\frac{qBt}{\gamma(v_0)m}\right) \\ 0 \\ mc \end{pmatrix}}{c} + b_{44} \\ &+ \frac{mv_0}{qBc} \left(\frac{db_{41}}{d\tau} \cos\frac{qBt}{\gamma(v_0)m} + \frac{db_{42}}{d\tau} \sin\frac{qBt}{\gamma(v_0)m} \right. \\ &\left. + \frac{qBct}{\gamma(v_0)mv_0} \frac{db_{44}}{d\tau} \right) \end{aligned} \quad (48)$$

5. ELECTRODYNAMICS IN UNIFORMLY ACCELERATED FRAMES AND IN UNIFORMLY ROTATING FRAMES – THE GENERAL EXPRESSIONS FOR THE ELECTROMAGNETIC 4-VECTOR POTENTIAL

Previously [17,18] we have dealt with the case of the transformation of Maxwell equations for the case of uniformly accelerated frames and uniformly rotating frames in arbitrary directions. The formalism derived in this paper, section 2, allows us to get a general transformation between the inertial frame S and S' and the inverse. The electromagnetic potential transforms the same way as the 4-coordinates (14) by virtue of being a 4-vector:

$$\begin{pmatrix} \Phi_x \\ \Phi_y \\ \Phi_z \\ c\phi \end{pmatrix} = A \begin{pmatrix} \Phi_x' \\ \Phi_y' \\ \Phi_z' \\ c\phi' \end{pmatrix} \quad (49)$$

where A is given by (15) for uniformly accelerated frames and by (37) for uniformly rotating frames.

In order to transform Maxwell equations between the frames, we need the partial derivatives with respect to x, y, z, t. We will show how to calculate two of them, as a blueprint.

$$\frac{\partial}{\partial t} \begin{pmatrix} \Phi_x \\ \Phi_y \\ \Phi_z \\ c\phi \end{pmatrix} = A \frac{\partial}{\partial t'} \begin{pmatrix} \Phi_x' \\ \Phi_y' \\ \Phi_z' \\ c\phi' \end{pmatrix} = \frac{A \frac{\partial}{\partial t'}}{\frac{\partial t}{\partial t'}} = \frac{A \frac{\partial}{\partial t'}}{a_{44}} \begin{pmatrix} \Phi_x' \\ \Phi_y' \\ \Phi_z' \\ c\phi' \end{pmatrix}$$

$$\frac{\partial}{\partial x} \begin{pmatrix} \Phi_x \\ \Phi_y \\ \Phi_z \\ c\phi \end{pmatrix} = A \frac{\partial}{\partial x} \begin{pmatrix} \Phi_{x'} \\ \Phi_{y'} \\ \Phi_{z'} \\ c\phi' \end{pmatrix} = \frac{A \frac{\partial}{\partial x'} \begin{pmatrix} \Phi_{x'} \\ \Phi_{y'} \\ \Phi_{z'} \\ c\phi' \end{pmatrix}}{\frac{\partial x}{\partial x'}} = \frac{A \frac{\partial}{\partial x'} \begin{pmatrix} \Phi_{x'} \\ \Phi_{y'} \\ \Phi_{z'} \\ c\phi' \end{pmatrix}}{a_{11}} \quad (50)$$

The inverse transforms are:

$$\frac{\partial}{\partial t'} \begin{pmatrix} \Phi_{x'} \\ \Phi_{y'} \\ \Phi_{z'} \\ c\phi' \end{pmatrix} = A^{-1} \frac{\partial}{\partial t'} \begin{pmatrix} \Phi_x \\ \Phi_y \\ \Phi_z \\ c\phi \end{pmatrix} = \frac{A^{-1} \frac{\partial}{\partial t} \begin{pmatrix} \Phi_x \\ \Phi_y \\ \Phi_z \\ c\phi \end{pmatrix}}{\frac{\partial t'}{\partial t}} = \frac{A^{-1} \frac{\partial}{\partial t} \begin{pmatrix} \Phi_x \\ \Phi_y \\ \Phi_z \\ c\phi \end{pmatrix}}{b_{44}}$$

$$\frac{\partial}{\partial x'} \begin{pmatrix} \Phi_x \\ \Phi_y \\ \Phi_z \\ c\phi \end{pmatrix} = A^{-1} \frac{\partial}{\partial x'} \begin{pmatrix} \Phi_x \\ \Phi_y \\ \Phi_z \\ c\phi \end{pmatrix} = \frac{A^{-1} \frac{\partial}{\partial x} \begin{pmatrix} \Phi_x \\ \Phi_y \\ \Phi_z \\ c\phi \end{pmatrix}}{\frac{\partial x'}{\partial x}} = \frac{A^{-1} \frac{\partial}{\partial x} \begin{pmatrix} \Phi_x \\ \Phi_y \\ \Phi_z \\ c\phi \end{pmatrix}}{b_{11}} \quad (51)$$

6. CONCLUSIONS

We constructed the general transforms from the frame $S(\tau)$ co-moving with an accelerated particle for rectilinear or circular motion into an inertial frame of reference S . The solution is of great interest for real life applications, because our earth-bound laboratories are inertial only in approximation; in real life, the laboratories rotate and they are accelerated. We produced a blueprint for generalizing the solutions for the arbitrary case and we concluded with a practical application of deriving the formula of the Lorentz force in a uniformly rotating frame.

REFERENCES

[1] C. Moller, *The Theory of Relativity*, Oxford Press, 1960.
 [2] L. H. Thomas, "The motion of the spinning electron," *Nature*, vol. 117, pp. 514, 1926.
 [3] A. Ben-Menahem, "Wigner's rotation revisited," *Am. J. Phys.*, vol. 53, no. 1, pp. 62-66, 1985.

[4] S. Ben-Menahem, "The Thomas precession and velocityspace curvature," *J. Math. Phys.*, vol. 27, no. 5, pp. 1284-1296, 1986.
 [5] H. Kroemer, "The Thomas precession factor in spin-orbit interaction," *Am J. Physics.*, vol. 72, no. 1, pp. 51-52, 2004.
 [6] J. A. Rhodes, and M. D. Semon, "Relativistic velocity space, Wigner rotation and Thomas precession," *Am. J. Phys.*, vol. 72, no. 7, pp. 943-960, 2005.
 [7] G. B. Malykin, "Thomas precession: correct and incorrect solutions," *Phys. Usp.*, vol. 49, no. 8, pp. 837-853, 2006.
 [8] M. I. Krivoruchenko, "Rotation of the swing plane of Foucault's pendulum and Thomas spin precession: Two faces of one coin," *Phys. Usp.*, vol. 52, no. 8, pp. 873-852, 2009.
 [9] A. Sfarti, "Hyperbolic Motion Treatment for Bell's Spaceship Experiment", *Fizika A*, vol. 18, no. 2, pp. 45-52, 2009.
 [10] A. Sfarti, "Coordinate Time Hyperbolic Motion for Bell's Spaceship Experiment", *Fizika A*, vol 19, no. 3, pp. 119-124, 2010.
 [11] A. Sfarti, "Relativity solution for "Twin paradox": a comprehensive solution," *Indian J. Physics*, vol. 86, no. 10, pp. 937-942, 2012.
 [12] K. Rebilas, "Comment on Elementary analysis of the special relativistic combination of velocities, Wigner rotation and Thomas precession," *Eur. J. Phys.*, vol. 34, no. 3, pp. L55-L61, 2013.
 [13] R. A. Nelson, "Generalized Lorentz transformation for an accelerated, rotating frame of reference," *J. Math. Phys.*, vol. 28, no. 10, pp. 2379, 1987.
 [14] <http://paulbourke.net/geometry/rotate>
 [15] A. Sfarti, "The General Trajectories of Accelerated Particles in Special Relativity", *J. Applied Physical Science International*, vol. 5, no. 4, pp. 205-212, 2016.
 [16] A. Sfarti, "The trajectories of charged particles moving at relativistic speeds inside particle separators—a fully symbolic solution," *Int. J. Nuc. Energy Sci. and Tech.*, vol. 4, no. 4, pp. 313-329, 2009.
 [17] A. Sfarti, "Electrodynamics in Uniformly Accelerating Frames as Viewed from an Inertial Frame", *Int. J. Phot. and Opt. Tech.*, vol. 3, no. 1, pp. 57-61, 2017.
 [18] A. Sfarti, "Electrodynamics in Uniformly Rotating Frames as Viewed from an Inertial Frame," *Int. J. Phot. and Opt. Tech.*, vol. 3, no. 1, pp. 62-66, 2017.